

How to roll a wall

Tutorial: ref: www.painterforum.com copyright painterforum.com 2006

Step One

Smooth out imperfections by applying drywall compound to any dings and dents. feather in patches by sanding them starting at the outside and sanding toward the center of the patch.

Step Two

Setup your paint by pouring a couple of gallons of paint into a five gallon bucket. Hang a roller grid (available at most hardware and paint stores) on the rim of the five gallon bucket. Paint trays are unhandy and have a way of finding your feet. Attach the roller frame to an extension pole, a two or three foot roller pole will save time and your back.

Step Three

Apply paint to the roller. Do not dunk or plunge it into the paint. Daub it into the paint, roll it up the grid in order to rotate the cover then daub it back into the paint until the entire cover is loaded with paint.

Step Four

Paint over all the patched areas with a light roller coat of the paint. This will lessen the likelihood of dull spots in the finished wall

Step Five

With a brush paint ("cut in") a three inch line into the inside corners, above the baseboard, and the top of the wall (at the ceiling).


Note: I suggest that you "cut in" the entire room before you start to roll (this may go against advice you have received from others). Start rolling back at the first wall you "cut in" or allow the paint to dry to touch before you start to roll. Lighten up on the roller as you roll into the "cut in" paint.

Step Six

Load the Roller

Step Seven

Starting in a corner apply the paint (with a loaded roller) in a large "N" pattern, about three feet wide and a foot or so from the top and bottom of the wall.



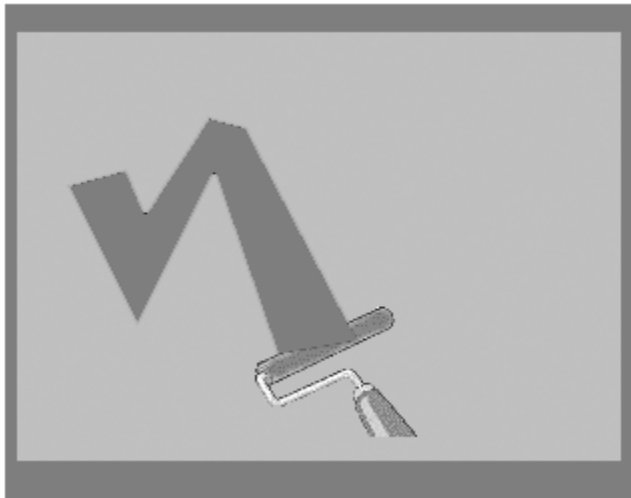


Note: In order to keep a "wet edge" in your work area limit the work area size to 2 1/2 ft. - 3 ft. This is particularly important with paints that have sheen.

Priming the wall with a primer/sealer before you finish paint will also help keep the paint from setting up to quickly as you roll the wall.


Step Eight, Nine & Ten

Load the roller lightly. Starting in the middle of the wall and at the outside edge of the pattern roll down to within an inch of the baseboard and back up to within an inch of the ceiling and back down, ending at the bottom of the wall. (Note: lighten up the pressure on the roller as you roll into the brushed paint at the top and bottom of the wall). Lay off this first section by working back to the wall corner.

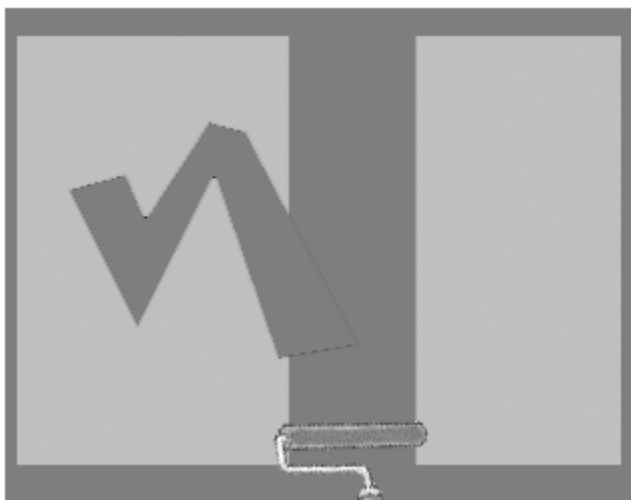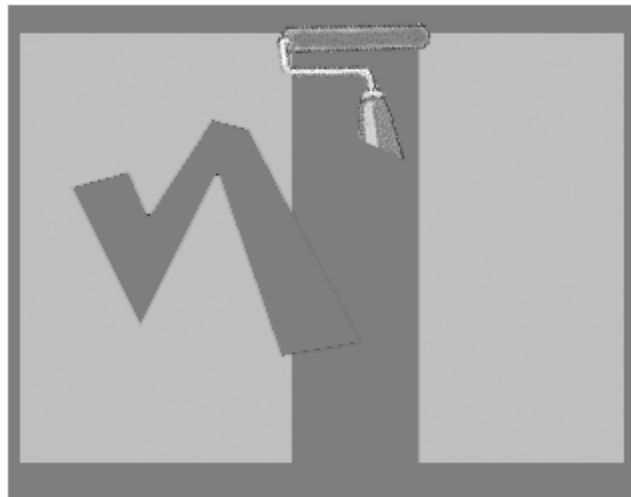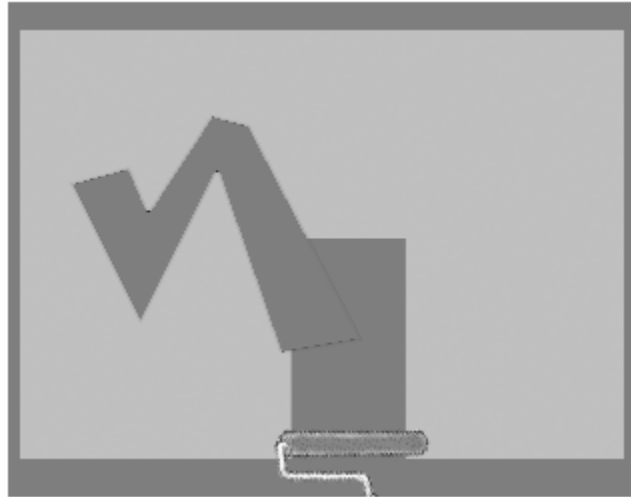



Step Eleven




Starting at about 3/4 the width of the roller, moving toward the corner ,repeat steps eight nine and ten. Be sure to keep paint in the roller. Do not dryroll the wall.



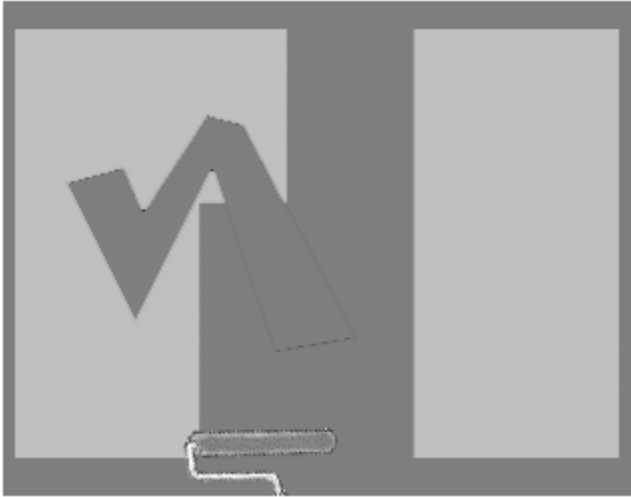


Step Twelve

Repeat until you reach the corner

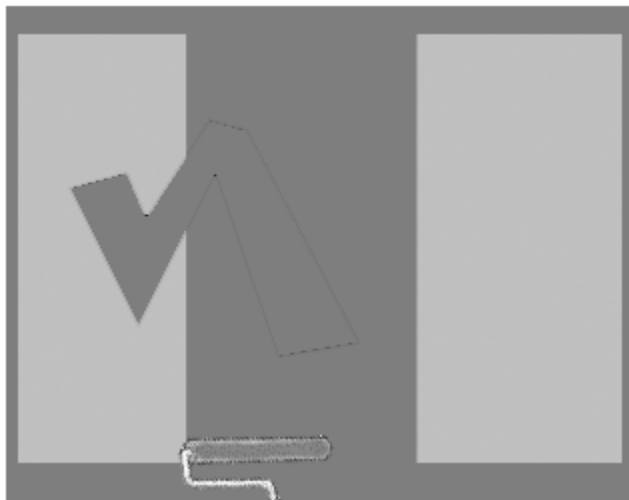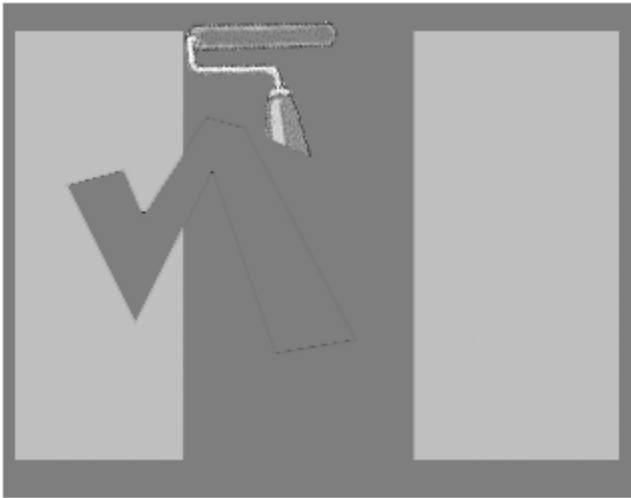

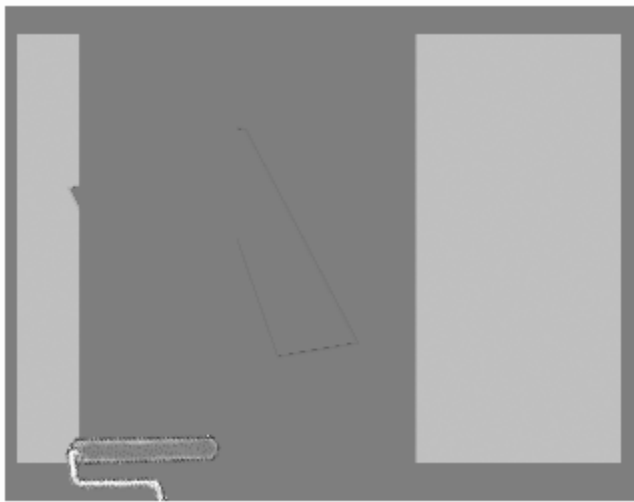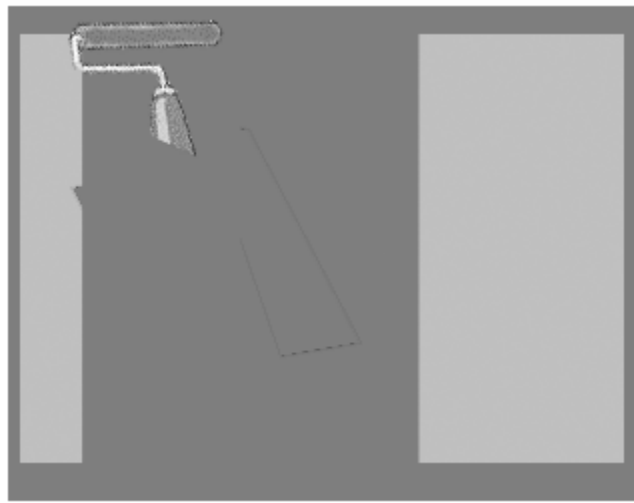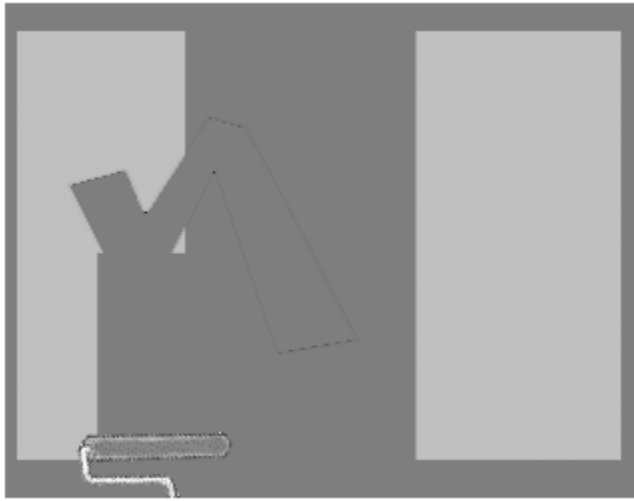

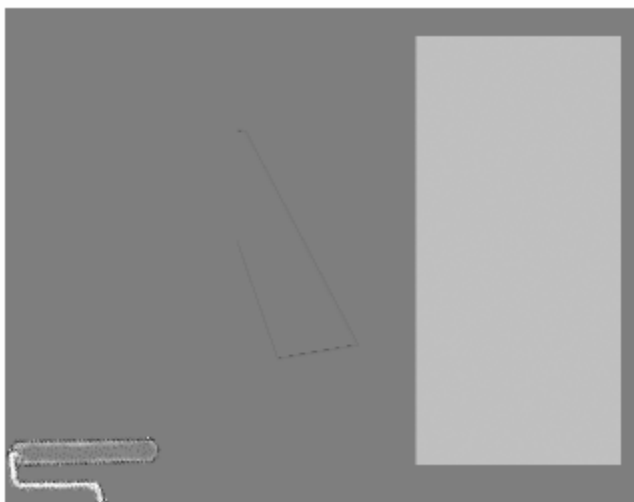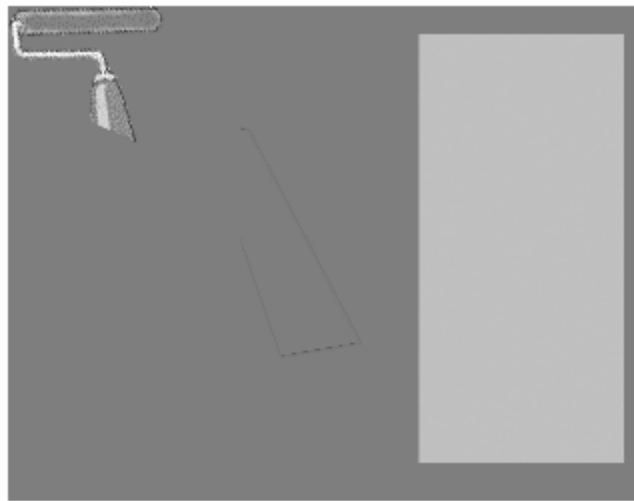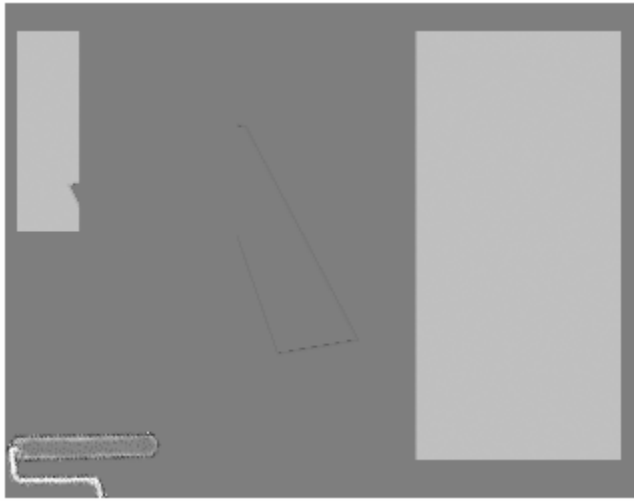

Last Step

Roll on the next section in the same way as above, but lay off the paint, working from the wet edge of the previously painted section and into the N pattern of the dry section. (Note: be sure to roll a few inches into the previously painted section.

Always end the finish roll on the down stroke).

